


- Soft Seat Feature Provides Extended Life
- Maximum Cracking Pressure Limited by Design

## PARTS LIST

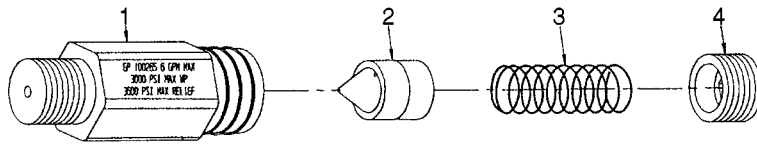


No.	Part No.	Description	Qty.
1.	510006	Housing, 1/4 NPT	1
2.	660039	Poppet	1
3.	720018	Spring	1
4.	510045	Adjustment Screw	1

## SPECIFICATIONS

Part No.	GRV36614/100265
Thread Size	1/4" NPT
Maximum Cracking Pressure	3600 PSI
Maximum Flow Rate	6 GPM
Maximum Temperature	180°F
Dimensions	.75 in. Hex X 2.15 in. long
Weight	3.0 oz.
Material	Brass, SST, Plastic

## PARTS LIST

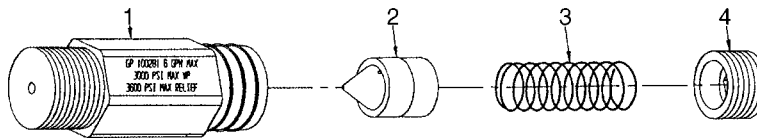


No.	Part No.	Description	Qty.
1.	510007	Housing, 3/8 NPT	1
2.	660039	Poppet	1
3.	720018	Spring	1
4.	510045	Adjustment Screw	1

## SPECIFICATIONS

Part No.	GRV36638/100281
Thread Size	3/8" NPT
Maximum Cracking Pressure	3600 PSI
Maximum Flow Rate	6 GPM
Maximum Temperature	180°F
Dimensions	.75 in. Hex X 2.15 in. long
Weight	3.2 oz.
Material	Brass, SST, Plastic

## PARTS LIST

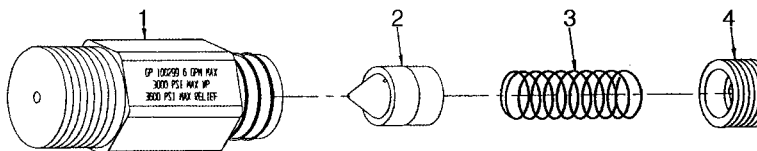

No.	Part No.	Description	Qty.
1.	510008	Housing, 1/2 NPT	1
2.	660039	Poppet	1
3.	720018	Spring	1
4.	510045	Adjustment Screw	1

## SPECIFICATIONS

Part No.	GRV36612/100299
Thread Size	1/2" NPT
Maximum Cracking Pressure	3600 PSI
Maximum Flow Rate	6 GPM
Maximum Temperature	180°F
Dimensions	.88 in. Hex X 2.25 in. long
Weight	4.8 oz.
Material	Brass, SST, Plastic


— More models on back —

# Safety Relief Valves

**GENERAL PUMP**

A member of the Interpump Group

## PARTS LIST

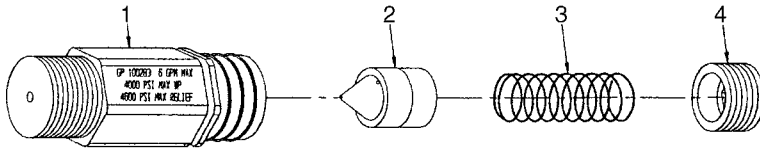


No.	Part No.	Description	Qty.
1.	510099	Housing, 3/8 NPT	1
2.	660039	Poppet	1
3.	720018	Spring	1
4.	510045	Adjustment Screw	1

## SPECIFICATIONS

**Part No. GRV46638/100283**

Thread Size	3/8" NPT
Maximum Cracking Pressure	4600 PSI
Maximum Flow Rate	6 GPM
Maximum Temperature	180°F
Dimensions	.75 in. Hex X 2.15 in. long
Weight	3.0 oz.
Material	Brass, SST, Plastic

## PARTS LIST

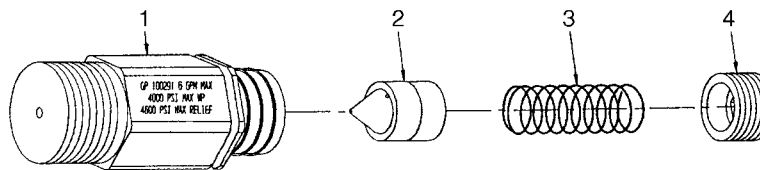

No.	Part No.	Description	Qty.
1.	510105	Housing, 1/2 NPT	1
2.	660039	Poppet	1
3.	720018	Spring	1
4.	510045	Adjustment Screw	1

## SPECIFICATIONS

**Part No. GRV46612/100291**

Thread Size	1/2" NPT
Maximum Cracking Pressure	4600 PSI
Maximum Flow Rate	6 GPM
Maximum Temperature	180°F
Dimensions	.75 in. Hex X 2.15 in. long
Weight	3.2 oz.
Material	Brass, SST, Plastic

## STATEMENT OF USE

This valve is designed as a safety relief valve to protect the pump and system from over-pressurization. It is intended to be a secondary safety device and should always be used in conjunction with a pressure regulator or unloader.

## INSTRUCTIONS

1. Set Safety Relief Valve to relieve desired pressure by adjusting the adjustment screw (#4) with a 1/4" Allen wrench. Turn clockwise to increase relief pressure, counterclockwise to decrease relief pressure.
2. Cycle Safety Relief Valve 3–4 times to ensure proper pressure setting.
3. Re-adjust relief pressure if necessary by repeating step 1.

